



Toll Free: 87 PERMATEX  
(877-376-2839)

10 Columbus Blvd., Hartford,  
Connecticut 06106

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

### Permatex<sup>®</sup> Auto Glass Sealer

AAM Revised 11/02

#### PRODUCT DESCRIPTION

Permatex<sup>®</sup> Auto Glass Sealer is a solvent based clear resin designed for use as a sealer around windshields, windows, sunroofs, etc.

S.I.N.: 834-300

#### PRODUCT BENEFITS


- Seals leaks
- Clear
- Waterproof
- Permanent
- Economical

#### TYPICAL APPLICATIONS

- Windshields
- Windows
- Sunroofs
- Headlamp assemblies
- Marine glass-
- RV vents and windows

#### DIRECTIONS FOR USE

1. Clean surfaces of dirt, oil, sealants and polishes.
2. Squeeze a bead of the sealer onto surface being sealed. If necessary, work sealer into crevices with a putty knife. Avoid contact with exposed painted surfaces.

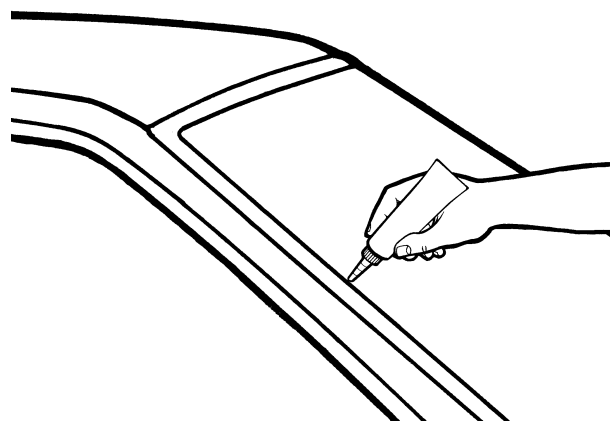

3. If sealer spills onto cars finish, wipe off immediately. Do not use acetone or nail polish remover to remove sealer from cars finish.

#### For Cleanup

1. Use acetone or nail polish remover to remove Auto Glass Sealer from fingers and exposed glass.
2. Clean hands with Permatex<sup>®</sup> brand hand cleaners.

#### PROPERTIES OF UNCURED MATERIAL

Chemical Type  
Appearance  
Odor  
Specific Gravity  
Flash Point, TCC, °F

**Typical Value**  
Synthetic Resin  
Clear liquid  
Penetrating  
0.93  
0

#### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

#### ORDERING INFORMATION

| Part Number    | Container Size           |
|----------------|--------------------------|
| 80329 (DWS-37) | 1.5 fl. oz. tube, carded |

#### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

#### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-877)PERMATEX)