



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Gasket Sealant & Dressing

AAM Revised 09/05

PRODUCT DESCRIPTION

Permatex® Gasket Sealant & Dressing is a grey polymeric compound that forms a seal by solvent evaporation. It is a non-hardening, soft, pliable paste with an alcoholic odor. Gasket Sealant & dressing is developed for use on cut or molded rubber gaskets to hold them in place during reassembly. The product allows for unlimited repositioning.

PRODUCT BENEFITS


- No measuring or mixing
- Eliminates "slippery" rubber gaskets
- Non-hardening for easy assembly and disassembly
- Resists common automotive fluids
- Corrosion, temperature and vibration proof
- Temperature range -65°F to +400°F

TYPICAL APPLICATIONS

- Automotive gasketing applications that require either cut rubber or molded rubber gaskets.

DIRECTIONS FOR USE

1. Clean flange surfaces thoroughly.
2. Apply a thin film of Gasket Sealant & Dressing to all sides of gasket.

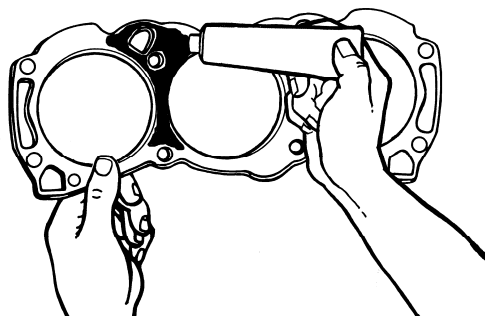

3. Allow to air dry for a few minutes until tacky.
4. Assemble and tighten.

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Polymeric material
Appearance	Grey paste
Odor	Alcoholic
Specific Gravity @77°F (25°C)	1.3
Viscosity	Paste
Flash Point, TCC, °F	134

Chemical / Solvent Resistance

The product retains effective properties in contact with automotive fluids, such as fuel, motor oil, transmission fluids, alcohol and antifreeze solutions.

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
09974	5 gm pouch

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-877)PERMATEX)